

Product Datasheet



alanod

ALANOD GmbH & Co. KG

Miro® White 98


Product	MW98 Series		
Delivery Options	Custom width coil and sheet size, removable protective film		
Thickness	0,48 mm	MW98A2 Aluminium	4700/1171/002/10.19
	0,64 mm	MW98A6 Aluminium	
max. Width	1220 mm		

Surface Properties

Treatment (S1)	High diffuse reflectance foil laminated on metal, matte finish		
----------------	--	--	--

Optical Properties

			Standard
Reflectance at 550nm	[%]	98,0 ± 1	DIN 5033-7
L* (D65)	[%]	99,0 ± 1	DIN 5033-7
a* (D65)	[%]	- 0,2 ± 0,5	DIN 5033-7
b* (D65)	[%]	0,7 ± 0,5	DIN 5033-7
Brightness (60°)		< 1	ASTM D2457, ISO7668
Brightness (85°)		< 1	ASTM D2457, ISO7669

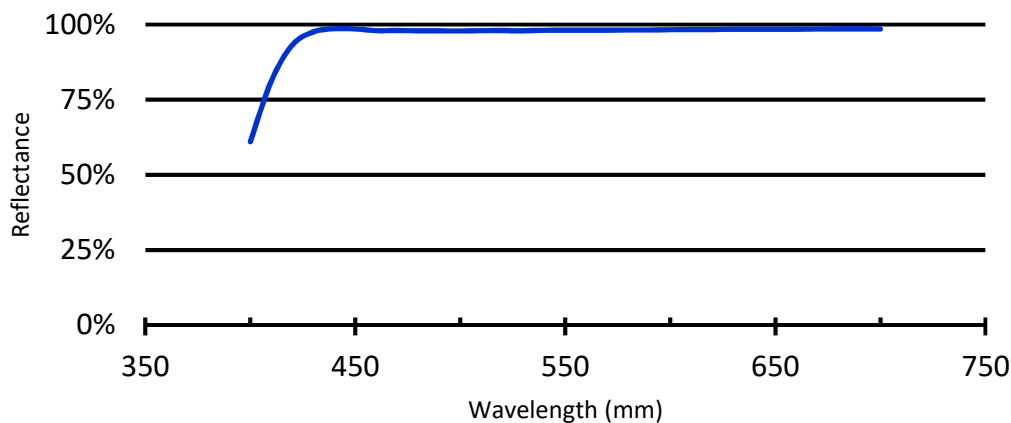

Formability	can be turret punched, roll formed, die stamped
Bond Strength	Film-tearing bond strength
Continuous Thermal stability	up to 100°C

Tolerances:	Coil, Strip, Sheet, Blanks		
Gauge	0,48 mm ± 0,04 mm		
	0,64 mm ± 0,04 mm		
Sheet	[mm]	0,00 - 600,00	+1,00 / -0,00
	[mm]	601,00 - 1500,00	+1,50 / -0,00
	[mm]	1501,00 - 2500,00	+2,50 / -0,00
	[mm]	2501,00 - 3500,00	+3,50 / -0,00



29.11.2019

Valid only on print date